

SKID-MATE® & SKID-MATE+PLUS®

AIR CUSHIONED PALLET PROTECTION PROVIDING PROTECTION WHERE IT'S NEEDED MOST



Every year shock and vibration causes millions of dollars of damage during transport and handling of sensitive and valuable equipment.

The SKID-MATE® is an air dampened cushioning device that provides a fast, cost effective and durable customized solution to protect sensitive products from shock and vibration. The SKID-MATE® can be easily mounted on a crate or pallet base creating an air-ride cushion in place of hardwood skid runners eliminating the need for expensive air-ride trucks.

Each color coded SKID-MATE® corresponds to a specific load range and allows users to calculate their requirements simply and easily to avoid potential laboratory testing and use of expensive packaging materials.



SKID-MATE®

SKID-MATE® cushions provide maximum cushioning and dampening performance with a minimum of size and weight. The SKID-MATE® air dampened cushioning devices are easily attached to a pallet base with a 5/16" - 18 UNC bolt threaded into the molded-in insert. (See reverse for more details. Metric M8 option is available.)

SKID-MATE+PLUS® is a SKID-MATE® cushion, plus a rugged polyethylene 1-1/8" thick spacer disk. The addition of the spacer to the SKID-MATE® increases the total height to 4", capable of accepting most pallet jacks worldwide.



SKID-MATE+PLUS®


	Tan Load Range Per Pad: 20-35lbs (9.1-15.9kg) P/N 35-630-035T		Blue Load Range Per Pad: 70-125lbs (31.8-56.7kg) P/N 35-630-125T
	Green Load Range Per Pad: 30-50lbs (13.6-22.7kg) P/N 35-630-050T		Orange Load Range Per Pad: 125-225lbs (56.7-102kg) P/N 35-630-225T
	Yellow Load Range Per Pad: 45-80lbs (20.4-36.3kg) P/N 35-630-080T		Spacer Black P/N 2-020-00509

* Master Pack 96/Box





- Reduce packaging design & assembly time and cost
- Eliminate costly damage from handling hazards during shipment
- Reduce costs associated with shock and vibration damage
- Provide protection during loading/unloading
- Eliminate the need for expensive air-ride vans
- Permit 4-way pallet entry design
- Easily add shock protection to crates/pallets
- SKID-MATE+PLUS® fits most pallet jacks worldwide

SKID-MATE®

PROTECTION AGAINST SHOCK & VIBRATION

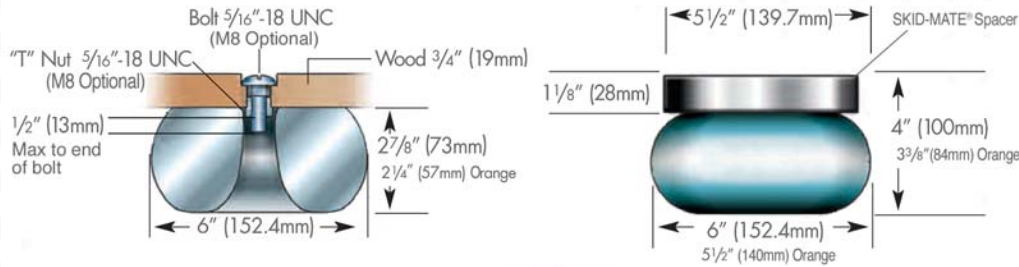

Typical SKID-MATE® pallet for heavy and sensitive loads.

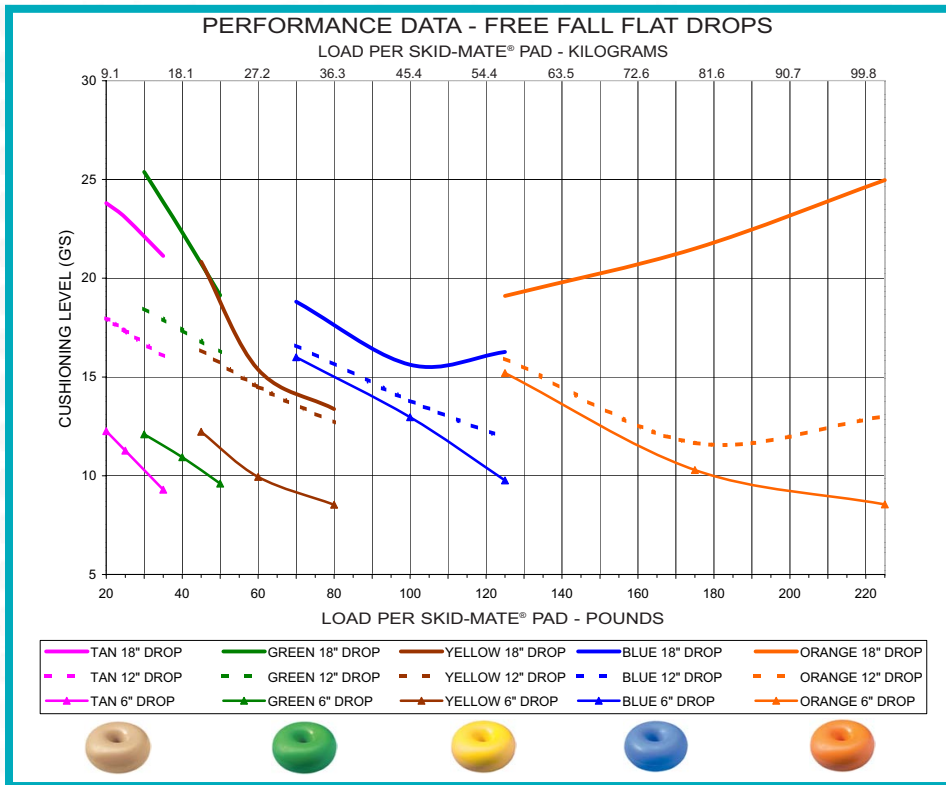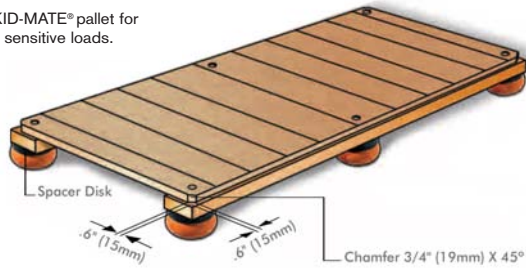

SHOCK RESISTANT

Reduce costly field service calls and repairs resulting from shock and vibration damage in transit.

DURABLE & TOUGH

Under the maximum load, cushions can endure 3000 feet (914 meters) of dragging over concrete and floor joints.

HIGH/LOW TEMPERATURES

Cushions are suitable for use between -40 F and +130F (-40 C to +54 C).

CHEMICAL RESISTANT

Cushions are made of polyethylene, a chemically inert material.

RECYCLABLE

Every cushion is environmentally friendly and reusable.